


Pentruder[®]

Pentruder CBK - Hydraulic wall saw

Quick disconnect coupling for blade



Pentpak hydraulic power pack

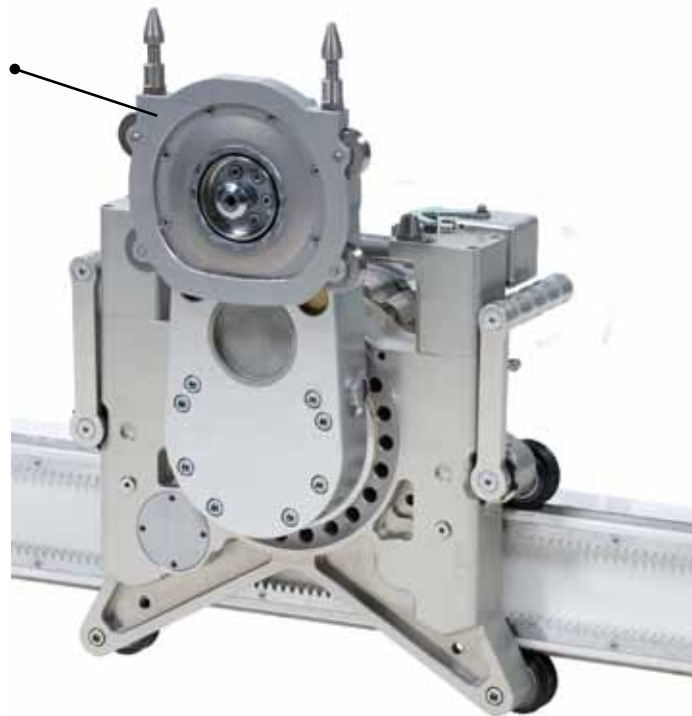

Easy take-off of hydraulic motor




Versatile track system



High performance - Reliability - Easy handling

- The Pentruder CBK offers a combination of high performance, easy handling and an attractive price.
- Can be used with 34 or 43 cc hydraulic motor.
- With its hydraulic motor which easily can be taken off the saw head and the quick disconnect coupling for the blade, the Pentruder CBK hydraulic is a very user friendly wall saw for the majority of cutting jobs.
- The Pentruder CBK hydraulic can be used with any of the Pentpak 15, 20 or 25. Other hydraulic power packs may also be used.
- The saw handles blades up to 1600 mm.

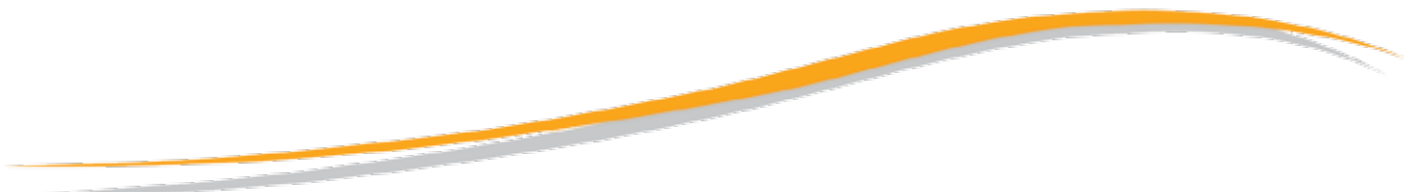

Technical data

Pentruder CBK - Hydraulic wall saw

Blade info

Saw blade diameter max.:	1600 mm (63")
Max cutting depth with max. Ø blade:	715 mm (28")
Max start Ø blade:	925 mm (36")

Power

Saw blade motor:	34 or 43 cc hydraulic motor
Max pressure 34 / 43 cc:	200 bar
Spindle rpm with 34 cc:	479 rpm with Pentpak 15/20
Spindle rpm with 43 cc:	721 rpm with Pentpak 25

Weight

Weight saw head:	24 kg (53 lbs)
Weight 34 / 43 hyd. motor:	12/12.5 kg (26.5/27.5 lbs)

Accessories

TS Track:	
0.85 / 1.15 / 2 / 2.3 / 3.45 m:	6.95 kg/m
TF2S Track foot symmetric:	3.2 kg
TFAB Angle adjustable track foot:	6.0 kg
TSS300 Joint block:	2.3 kg
TSP1 Track stop:	0.7 kg
GH Blade guard holders, GHSW1 swing type / GH-PCBK parallel:	0.8 / 2.0 kg
Blade guards swing type*:	
GS Full 800 / 1000	11 / 15
1200 / 1600 / 2000	17 / 20 / 39 kg
GSF Flush 800 / 1000 / 1200 / 1600	6 / 6.5 / 7 / 14 kg
TYHF Transport trolley for HF-saws:	27 kg
QE Blade flange sub ass. cpl:	2.4 kg
QEF Flush cutting flanges:	
108 / 110 / 130 mm / 1-3/8" / 1":	1.3 kg

* Other type of blade guards are also available.
See www.pentruder.com

Pentpak 15 / 20 / 25 Hydraulic power pack

Pentpak 15	42 L/min@175 bar
Pentpak 20	42 L/min@200 bar
Pentpak 25	80 L/min@140 bar
Input Voltage:	400 V
Input frequency:	50 Hz
Minimum fuse:	16 / 25 / 32 Amp
Recommended fuse:	32 / 32 / 63 Amp
Weight:	26 kg

All technical data can be subject to change without notice.

System

The Pentruder CBK is used with a 34 cc hydraulic motor and one of Pentpak 15 or 20 or a 43 cc hydraulic motor and the Pentpak 25.

The same accessories are used as for the other Pentruder wall saws.

The Pentruder Modular Concrete Cutting System is truly modular and based on the wall saw track which is used not only for wall sawing but also for the drill rig and for the wire saw rig, as well as for other applications.

Be sure to check out the other modules in the **Pentruder Modular Concrete Cutting System!**

Pentruder[®]

by **TRACTIVE**

Tractive AB, Gjutargatan 54, 78170 Borlänge, Sweden
Tel: +46 (0)243 221155, Fax: +46 (0)243 221180
E-mail: info@tractive.se, www.pentruder.com